

28165K-4-4

ATM

PRESSURE

ENVIRONMENTAL CONDITIONS

TEMP -40°F TO 225°F

PRESSURE 1000 PSI

VACUUM

CHEMICALS

QC TESTING

VACUUM LEAK @

PRESSURE LEAK @ 1000 PSI

ELECTRICAL HIPOT@ 150VAC

HOUSING SPECIFICATIONS

HSG P/N 12271-3-2

SIZE 3/4"-16

MAT'L STN STL

TYPE SAE


LEAD WIRE/CONNECTOR DATA

CONTAINS:

(2PR) #24AWG TYPE 'K' TEFLON

T/C CABLE

P/N 29553-24

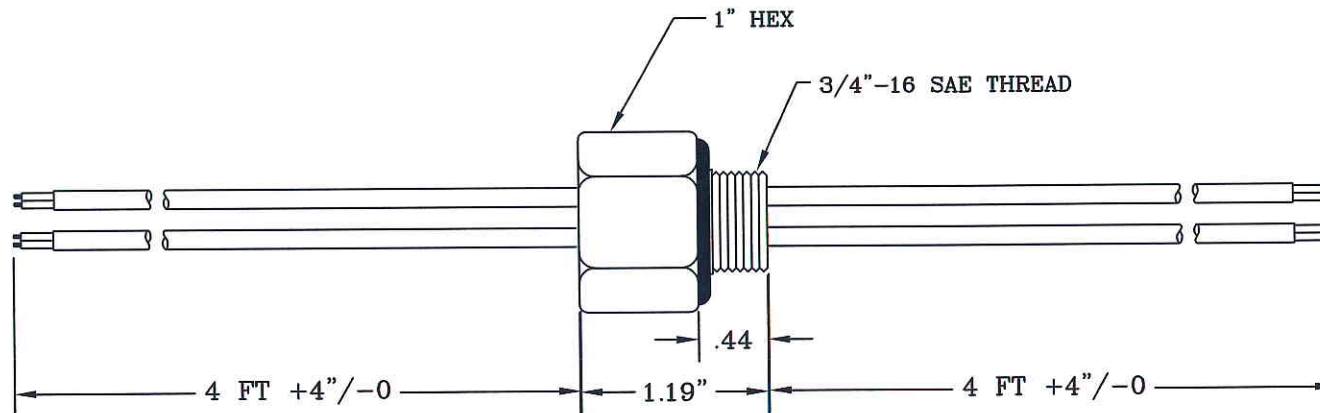

CUSTOMER APPROVAL	
By:	<i>[Signature]</i>
Date:	08/28/2005

UNLESS NOTED: All Dimensions in Inches, Remove All Burrs, Break All Sharp Edges, Tolerances: .XX ±.01, .XXX ±.005

MASTER

DOUGLAS ELECTRICAL COMPONENTS



14 Beach Street, Rockaway, NJ 07866

PH: 973-627-8230 FX: 973-627-5796

NOTES:

1. ALL WIRES SHOWN
2. MARK/TAG WIRES BOTH ENDS

REV	ECN#	APP'D	DATE

Drawn RSM
Date 10/25/05
App'd *[Signature]*
Date 10/26/05

TITLE
3/4"-16 SAE T/C TYPE K
FEEDTHRU
Dwg No 28165K-4-4
Rev. OF

Ref: PRAXAIR 10024363

SCALE: NTS

SHEET 1 OF 1